

ACCUD


ACCURATE MEASUREMENT



See full product range at: accud.nz

Imperial Dial Bore Gauge

Series 252

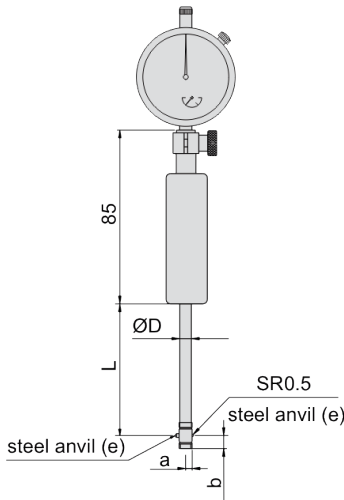

Range: 0.24-0.4"

© Copyright M Gamer Pty. Ltd. 2023

Features

Wooden handle isolate heat conduction
Optional accessory: Long handle series 250

Specifications

Part No	Range	Indicator	Accuracy	Repeatability	a	b	c	Diameter1	Diameter2	e	L
AC-252-004-11	0.24-0.4"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.00075"	0.00015"	3.6	5.7	-	-	4.5	SR1	48
AC-252-007-11	0.4-0.7"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.00075"	0.00015"	5.6	7.8	-	-	6	SR1	105
AC-252-015-11	0.7-1.5"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.00075"	0.00015"	12.2	6.4	-	12.7	9	SR1	141
AC-252-024-11	1.4-2.4"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.0009"	0.00015"	26	9	27	13	12.8	SR2	141
AC-252-060-11	2-6"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.0009"	0.00015"	26	9	35	13	12.8	SR2	141
AC-252-100-11	6-10"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.0009"	0.00015"	56.5	13	74.5	15	14.5	SR3.5	400
AC-252-160-11	10-16"	Dial Indicator Range: 0.25" Graduation: 0.0005"	±0.0009"	0.00015"	86.5	15	101.5	15	14.5	SR3.5	400